

Care Shower

Model CSABATLF – Healthcare Thermostatic Shower - Datasheet

Description

The Arrow Valves Care Shower is a special thermostatic electric shower (meeting BEAB Care Mark requirements as being safe for use by elderly, young and sick) and Booster Pump package (model CSABATLF).

The assembly has Fluid Category 5 backflow protection via integral AB air gap with booster pump and is therefore suitable for the highest risk applications.

The shower is supplied with a 2 m long hose. The integral backflow protection prevents contamination should the hose become submerged in bath or toilet water. The shower is designed to be easily operated with large tactile buttons and rubber grips on the adjustable spray head. Supplied with spray head, slide rail and additional spray head holder.

The shower provides water at an adjustable maximum temperature setting between 37°C – 48°C (should be restricted on site to 41°C in-line with DO8 recommendations) and has accuracy to $\pm 1^\circ\text{C}$. The sophisticated thermostatic control compensates for changes in:- pressure, incoming temperature and voltage.

The Booster Pump ensures generous flow even when used in low pressure areas. The pump can be installed adjacent to the shower or in another serviceable location up to 10 m away. Automatic pump control is by means of a pressure vessel, industrial pressure switch and a flow sensor. The pump has a "soft start" feature, which avoids water and electrical surges. The pump is protected via low level float switch in the cistern.

Features

- Temperature / pressure / voltage stabilised
- Phased shutdown – reduces hot spots and scale
- High/low flow rate selection button
- Separate temperature control
- Self calibrating
- Booster pump
- Audible beep
- Backlit Power On button
- Low/high flow rate LED
- Low pressure/high temperature LED
- General fault LED
- Water Regulations approved

Supply

15 mm cold water supply is required at a minimum dynamic pressure of 0.5 bar. Max supply pressure 10 bar.

Electrical Specification BTMIDI

| | | |
|-----------------------|----------------|-----------------|
| Volts/Phase/Frequency | 230/1/50 | |
| Motor type | | |
| IP Rating EN60529 | IP15 (cabinet) | IP65 (controls) |
| Power Consumption | 350W | |
| Full Load Current | 1.6 A | |
| Rating | Continuous. | |

Electrical Specification - Shower

| | | |
|--------|---------------------------------------|--|
| Supply | 207 – 253 V / 50 Hz | |
| Power | 9.0 kW @ 240 V (standard) – 40 A fuse | |
| | 9.8 kW @ 240 V (optional) – 45 A fuse | |

Water Regulations

The Care Shower complies with the requirements of the latest Water Regulations when installed and used correctly. The integral AB air gap provides protection against Fluid Category 5 risks – these risks are the highest level. The Care Shower model CSABATLF can therefore be used for all applications.



Care Shower consists of an electric shower and Booster Pump package

Applications

The Care Shower meets BEAB Care Mark requirements as being safe for use by the elderly, young or sick.

- Healthcare – assisted bathing
- Nursing homes
- Veterinary
- Dog grooming
- Medical
- Mortuary
- Butchery
- Bidet and toilet (paperless)

Materials

| | |
|-----------------------------|----------------------------|
| Pump enclosure | Stainless steel (polished) |
| Cover, controls, showerhead | ABS |
| Spray plate | Acetal |

Codes and Descriptions

| Size | Code | Description |
|------|----------|---------------------------------------|
| All | CSABATLF | Care Shower & Booster Cat 5 BEAB Care |

Specification

| | |
|-------------------------|--|
| Temperature max. | Adjustable 37°C – 48°C |
| Temperature Restricted | 41°C (factory set) |
| Temperature Accuracy | $\pm 1^\circ\text{C}$ |
| Incoming water supply | 2°C – 28°C |
| Approvals (Shower) | BEAB Care, RNIB, WRAS 0712300, KIWA 0710703, CE Mark |
| Approval (Booster Pump) | KIWA UK 0605701 |

Arrow Valves Ltd

Tel: 01442 823123 Fax: 01442 823234

www.arrowvalves.co.uk
info@arrowvalves.co.uk

Arrow Valves Ltd reserve the right to change specifications, design and materials at any time without notice.
All unit-less dimensions in mm.


© Copyright Arrow Valves Ltd 2007-2012



Care Shower

Model CSABATLF – Healthcare Thermostatic Shower - Datasheet

Dimensions

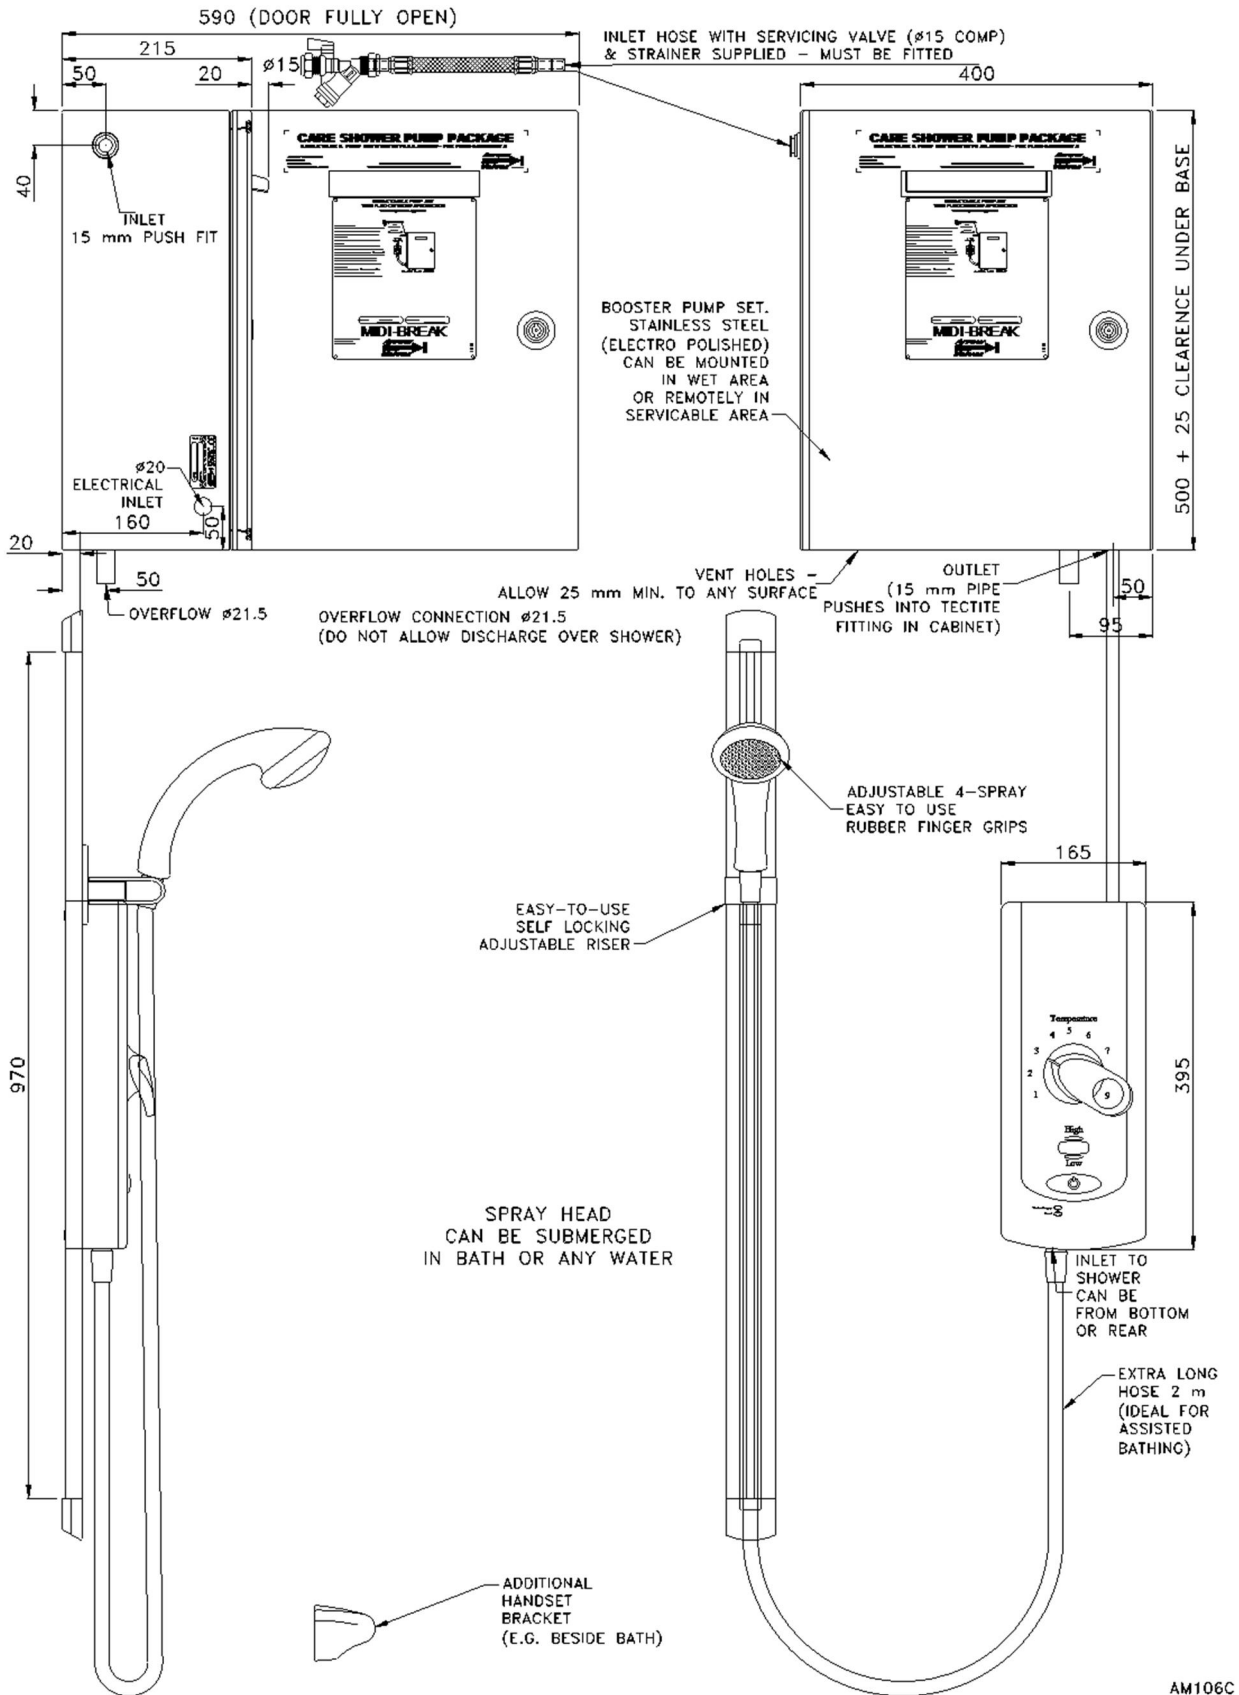

Arrow Valves Ltd

Tel: 01442 823123

Fax: 01442 823234

www.arrowvalves.co.uk

info@arrowvalves.co.uk

Arrow Valves Ltd reserve the right to change specifications, design and materials at any time without notice.
All unit-less dimensions in mm.

© Copyright Arrow Valves Ltd 2007-2012

