

Automatic Flow Limiting Valves



- WRAS Approved
- Qualifies for Enhanced Capital Allowances*
www.eca.gov.uk

*(4 lt/min and 6 lt/min only)

Lever Optional

Servicing Valve capable of accepting a flow limiting cartridge, which can be inserted after installation.

- Balances the flow of water to appliances
- Saves water and energy
- Range of connections to suit most pipe systems

Ideal for installation at points of use on 15 mm and 22 mm hot and cold water plumbing system including:

- Wash Basins
- Baths & Sinks
- Bidets
- WCs (use strainer cartridge as required by Regulation R25.6)
- Dishwasher & Washing machines version

Flow Limiting Cartridges



- Cartridge removed with pliers

Once the valve has been fitted, an appropriate cartridge can be inserted through the side port – no need to drain system.

The variable orifice of the cartridge automatically limits the flow of water with 8 different flow rate options. The flexing orifice avoids build up of scale and allows particles to pass through.

Coloured identity disc supplied with each cartridge states flow rate of cartridge installed.

By limiting the maximum flow rate guess work is removed from designing other aspects of the system such as pipe size, tanks and pumps.



8 flow limiting cartridges each with a different flow rate ranging from 0.07 – 0.43 Lt/s. Strainer version also available.

FOR FURTHER INFORMATION ON AFL VALVES AND MANY OTHER PRODUCTS PLEASE VISIT OUR WEBSITE AT:
www.arrowvalves.co.uk

The Water Regulations Solution Specialist



ARROW VALVES LTD

☎ 01442 823123 ☎ 01442 823234

✉ info@arrowvalves.co.uk www.arrowvalves.co.uk

"Equi-Flow" - Shower Flow Limiter




MODEL AFLE
Size: DN15 4 available flow rates:
0.07, 0.1, 0.13 or 0.17 Lt/s


- The "Equi-Flow" is especially designed to be installed on showers in buildings with multiple occupancy e.g. flats and hotels.
- Easily fitted to a shower hose to ensure even distribution of water in a controlled and balanced manner.

UK Water Regulations KIWA approved

Without "Equi-Flow"

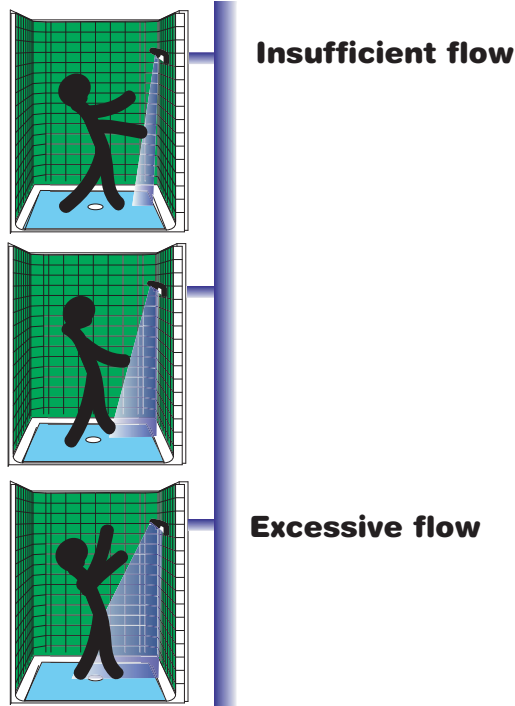

With "Equi-Flow"

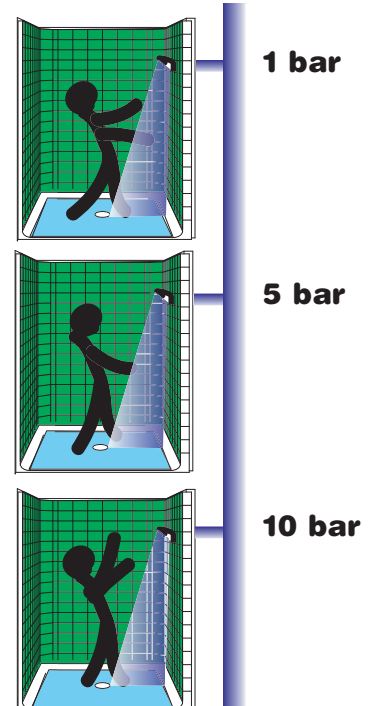

Even distribution

Double Check Valve



MODEL ED235
Double Check Valve
Fluid Category 3 protection

ED235 - Double Check Valve provides Fluid Category 3 backflow protection from flexible hoses. Fits to a standard DN15 shower hose.

ED235WT - As ED235 but incorporating a flow limiting cartridge, offering benefits of "Equi-Flow" whilst providing Fluid Category 3 protection. Size: DN15.



Double Check Valve (Fluid Category 3 protection) c/w flow limiting cartridge. 4 available flow rates: 0.07, 0.1, 0.13, 0.17 Lt/s

NO TOOLS TO FIT.

UK Water Regulations KIWA approved

**FOR FURTHER INFORMATION ON AFL VALVES AND MANY OTHER PRODUCTS PLEASE VISIT OUR WEBSITE AT:
www.arrowvalves.co.uk**

The Water Regulations Solution Specialist



ARROW VALVES LTD

☎ 01442 823123 📠 01442 823234

✉ info@arrowvalves.co.uk www.arrowvalves.co.uk