

"Boost-A-Break"

Primarily designed to provide Fluid Category 5 backflow protection and to boost water pressure for high flow applications


Options



Wall mounting brackets
Model BTBRA



Floor standing cabinet c/w internal heating
Model BTCAB1 / BTCAB2

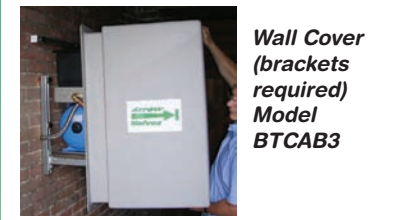

Wall Cover (brackets required)
Model BTCAB3



Drip Tray
Model BTDT1 / BTDT2



Expansion Vessel (for fixed speed only)
Model EVUP

FOR FURTHER INFORMATION ON "BOOST-A-BREAK" AND MANY OTHER PRODUCTS PLEASE VISIT OUR WEBSITE AT:
www.arrowvalves.co.uk

Break Tank & Booster Set - FIXED SPEED

- Washdown
- Waste bin washing
- Healthcare premises - Baths, bedpan washers, dialysis machines, clothes washing and dishwashing
- Underground irrigation
- Butchery / meat / vegetable equipment
- Laboratories
- Non-domestic hose union taps - inc. taps capable of accepting a hose
- Dental equipment
- Bidet washing
- Grey water recycling
- Water Storage - for agricultural and fire-fighting purposes
- Mortuary equipment



Model BTAB

The "Boost-A-Break" is supplied as a complete package - factory tested and can easily be installed in a compact space such as a stairwell (measures only 0.7h x 0.57w x 0.5d).

The pump is acoustically attenuated by virtue of anti-vibration feet and braided stainless steel flexible connection hoses.

- Suitable for unorthodox drinking water - hygienic type AB air gap
- Range of pump duties
- High flow rate - 1 Lt/s output

For domestic boosting use the fixed speed "Pent-A-Boost" model BTAF

UK WATER REGULATIONS KIWA approved

The Water Regulations Solution Specialist

"Boost-A-Break"

Ideal for high and varying demands

Options - for fixed and variable speed units




Wall mounting brackets Model BTBRA

Floor standing cabinet c/w internal heating Model BTCAB1 / BTCAB2



Wall Cover (brackets required) Model BTCAB3

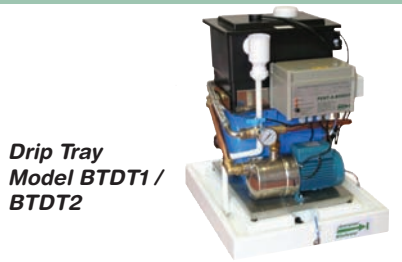

Drip Tray Model BTDT1 / BTDT2

FOR FURTHER INFORMATION ON "BOOST-A-BREAK" AND MANY OTHER PRODUCTS PLEASE VISIT OUR WEBSITE AT: www.arrowvalves.co.uk

Break Tank & Booster Set - VARIABLE SPEED



Model BTAB

The variable speed range provides Fluid Category 5 backflow protection and has the benefits of the fixed speed range plus -

- **Higher flow rate** - up to 2.0 Lt/s output
- **Range of pumps**
- **Variable speed** - speed changes to meet demand
- **Surge free** - inverter pump avoids high current demand
- **Constant supply pressure** - integral pressure transducer

By ensuring only the required amount of water is supplied the variable speed "Boost-A-Break" is extremely economical and pump lifespan is extended.

The pump in the variable speed "Boost-A-Break" qualifies for the Enhanced Capital Allowances (ECA) scheme making it environmentally beneficial and very efficient.

For domestic boosting use the fixed speed "Pent-A-Boost" model BTAF. For dual pumps - see Dual Pump "Boost-A-Break" - Available as Duty Standby or Duty Assist.

UK WATER REGULATIONS KIWA approved

The Water Regulations Solution Specialist

Arrow
Valves

ARROW VALVES LTD

☎ 01442 823123 ☎ 01442 823234

✉ info@arrowvalves.co.uk www.arrowvalves.co.uk