


ALL DIMENSIONS IN mm

DO NOT SCALE


IF IN DOUBT ASK



3rd ANGLE PROJECTION

DATE
TESTED BY

SUPPLY VOLTAGE - 230 V  
 SUPPLY FUSE - 5 A ANTI SURGE / 6 A MCB  
 POWER DF15 - 350 W

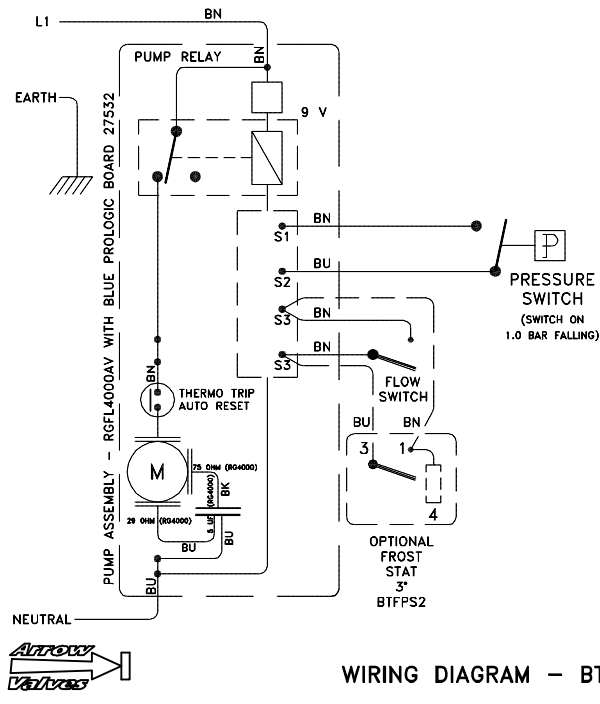

NOTE  
 APPLICABLE TO BTMIDI-1 FITTED WITH RGFL4000AV PUMP.  
 (FROM APRIL 2011)

DRY RUNNING PROTECTION SYSTEM WILL STOP THE PUMP  
 AFTER 1 MIN. OF PUMP RUNNING WITH NO FLOW SWITCH  
 SIGNAL.

CHECK FOR ADEQUATE WATER SUPPLY  
 (E.G. CHECK STRAINER).

TO RESET - SWITCH POWER OFF, THEN BACK ON.

WIRING DIAGRAM - BTMIDI-1 (RG PUMP)

arrowvalves.co.uk  
 AM125F 10/02/12

ARROW VALVES LTD  
 68 HIGH STREET  
 TRING HERTS  
 HP23 4AG  
 Tel: 01442 823 123 Fax: 01442 823 234  
 e-mail: info@arrowvalves.co.uk  
 web: www.arrowvalves.co.uk



TITLE: **BTMIDI-1 WIRING DIAGRAM (RG PUMP)**

DRN: SHG CHECKED BY: DATE: ©2012

This drawing is the property of Arrow Valves Ltd and must not be copied without prior written permission

MATERIAL: CARD 160 g/sqm

FINISH: SCALE: 100%

DRG No: AM125F DATE: 10/02/12