

“Conceal-A-Tap” – Concealed Hose Union Tap

Model HUC - (Vandal & Frost Resistant) - Datasheet

Description

Vandal proof and frost resistant hose union tap, which is recessed into a wall. The tap seat is located 100 mm deep into the wall and therefore within the thermal envelope of the building. The outlet drains once the tap is closed and hose removed - the unit is unlikely to freeze. A special key is supplied to extend the telescopic assembly and then the same key operates the tap.

The unit is suitable for any thickness of wall – the installer cuts the 15 mm copper tube to the required length. Walls or partitions less than 113 mm would result in the unit protruding behind the panel. The Conceal-A-Tap is ideal for standard cavity walls.

The hose usually hangs down to avoid kinking, however the telescopic assembly also rotates to enable the hose to exit in any direction. The unit may be installed in floors in frost protected areas – e.g. sports changing rooms etc.

Installation

Conceal-A-Tap is easy to install, requiring a 100 mm diameter hole – use standard core drill – through the external wall. The internal wall requires a 17 mm hole (no insulation) or 30 mm with insulation. It is secured to the wall with three No.6 screws, which are covered by the disc (disc removable to facilitate installation – hexagon key supplied). The installation kit includes – full bore servicing valve, low headloss double check valve (model ED15C515), push-fit metal elbow, stainless screws, wall plugs and brass DN15 Inter-lock hose connector.

Specification

Pressure Supply 10 bar max.
 Wall thickness Any (will protrude if <113 mm)
 Inlet 15 mm copper
 Outlet compatible with Brass CK Inter-lock & “Hozelock”
 Approval KIWA UK A030526
 Patent Pending

Materials

Housing Gunmetal
 Disc (standard) Stainless steel (brushed)



*Conceal-A-Tap – brushed stainless disc.
Suits any wall thickness*

Water Regulations

The local water company can “risk assess” the proposed installation and determine the level of protection required (G15.18). A Double Check Valve is the minimum backflow protection required for Fluid Category 3 applications – model ED132 (very low headloss). Supply via an RPZ valve for Fluid Category 4. By default, all non-house HU taps are Fluid Category 5 (G6.1e) requiring a dedicated Break Tank and Booster Set with type AB air gap (model BTABV). A Servicing Valve should be fitted to the supply (G11.1).

Servicing

All servicing is performed from the front, where it is possible to replace the standard tap cartridge and all seals – the servicing kit contains –
 * Cartridge * Seal set & silicone grease * 3 mm hexagon key


Options

The standard disc is brushed stainless. Brass or coloured coatings available – contact us. Security kit includes additional screws and key – locking disc closed.

Range of hoses, wash down guns & quick connectors.

Codes and Descriptions

Size	Code	Description
15 mm	HUC15	Conceal-A-Tap Stainless Disc
15 mm	HUCINKIT	Conceal-A-Tap Installation Kit
	HUCSECKIT	Conceal-A-Tap Security Kit
	HUCSPKIT	Conceal-A-Tap Service Kit
	HUCKEY	Replacement HUC Key
Ø100	HUCD100TC	Core Drill Tungsten Carbide Ø100 x 110
Ø9	HUCDPD9	Pilot Drill For Core Drill Ø9
110	HUCDASDS110	Drive Adapter For Core Drill SDS 110 mm

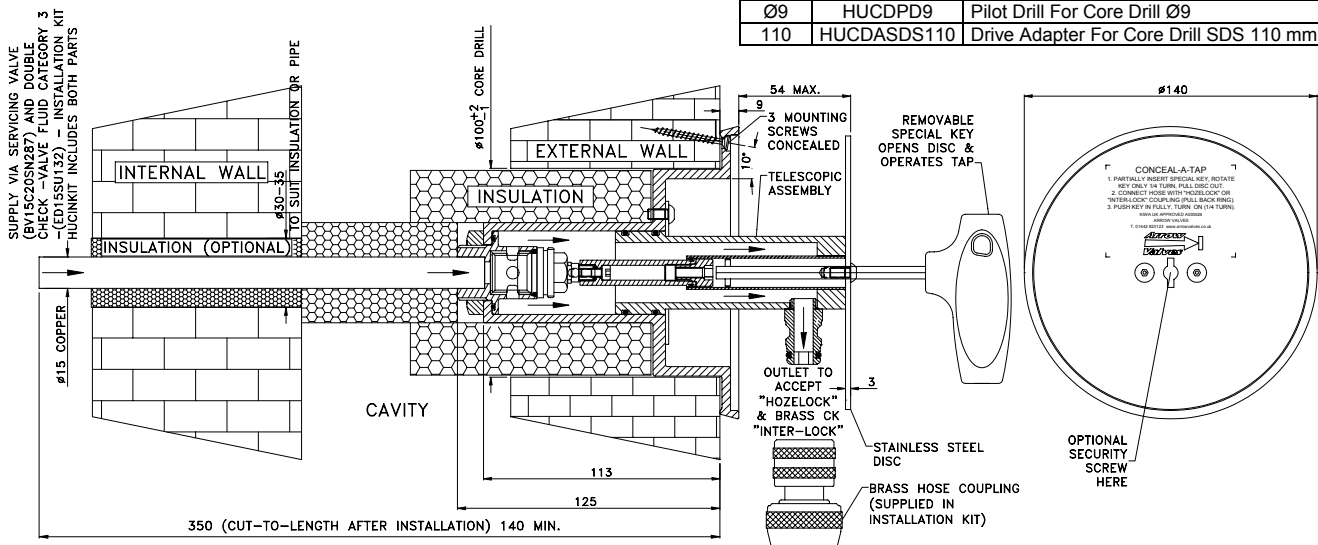

Arrow Valves Ltd

Tel: 01442 823123 Fax: 01442 823234
 www.arrowvalves.co.uk
 info@arrowvalves.co.uk

Arrow Valves Ltd reserve the right to change specifications, design and materials at any time without notice.
 All unit-less dimensions in mm.
 © Copyright Arrow Valves Ltd 2003-2011

